

EED: Energy Efficient Disk Drive Architecture

Yuhui Deng

Frank Wang

Na Helian

Center for Grid Computing,
Cambridge-Cranfield High Performance
Computing Facilities, Cranfield University
Campus, Bedfordshire MK43 0AL,
United Kingdom

Department of Computer Science,
University of Hertfordshire,
United Kingdom

Outlines

- Introduction
- Architecture
- Implementation
- Experimental Evaluation
- Conclusions

Introduction (1/2)

- Energy saving has become one of the most important challenges in designing computing systems
- A number of non-volatile storage technologies are emerging and bring opportunities to the architecture design of disk drives

Introduction (2/2)

- Motivation
 - The emerging non-volatile storage technologies
 - Highly skewed data access pattern
- An **Energy Efficient Disk (EED)** drive architecture which can reduce energy consumption significantly, while also improving performance


Architecture (1/3)

- The storage space of the EED is divided into two areas in terms of the LBA
 - Magnetic disk media
 - Non-volatile memory
- Both areas are exclusive


Architecture (2/3)

- Categories of data
 - Hot data (Frequently accessed data)
 - Cold data (Rarely accessed data)
- Because most of the frequently accessed data can be satisfied from the non-volatile memory, the disk can be spun down and remain in the low power state

Architecture (3/3)

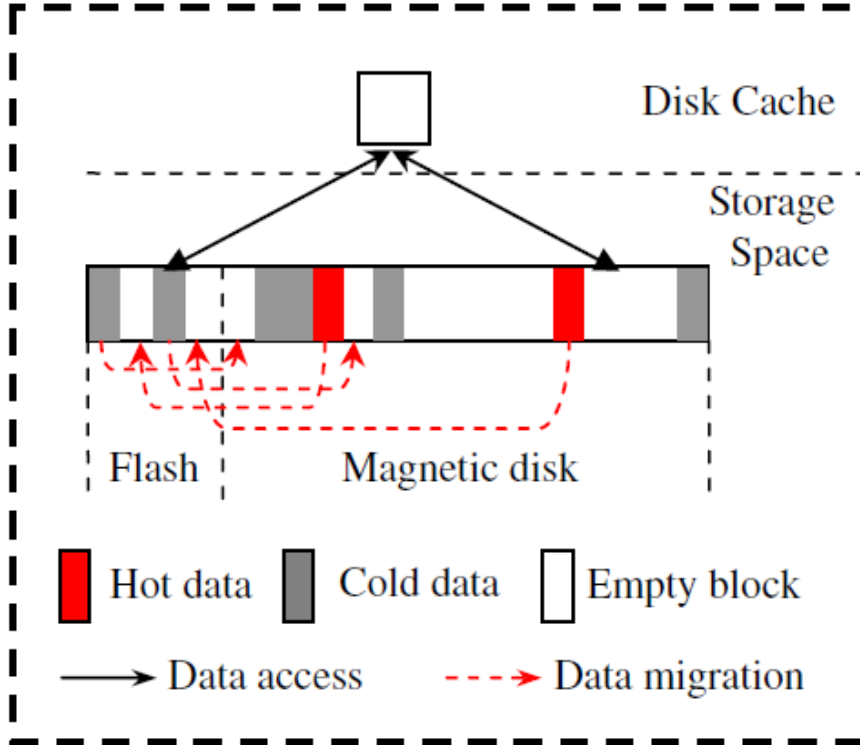

(a) Data layout of the EED before data migration

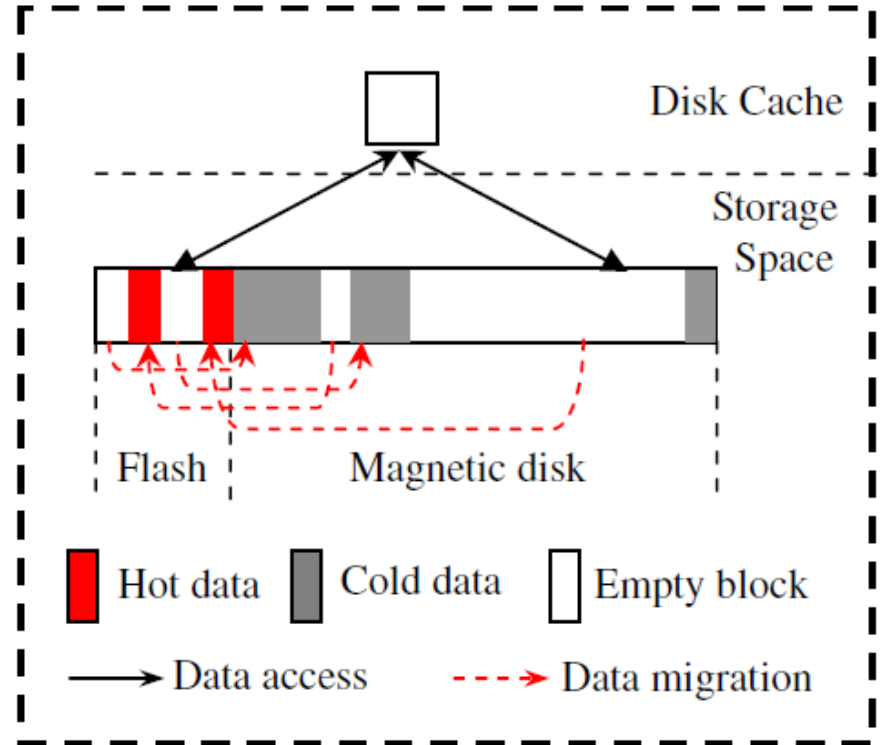

(b) Data layout of the EED after data migration

Implementation (1/6)

- Non-volatile memory
- Frequency monitoring
- Data migration

Implementation (2/6)

- Non-volatile memory
 - Integrating NAND
- Frequency monitoring
 - The correlations of data can be used to improve the effectiveness of storage caching
 - For example
 - Spatial locality
 - To keep the block correlations, clustering the consecutive data blocks into objects

Implementation (3/6) – Frequency monitoring

- An object is defined as a group of consecutive blocks in terms of LBA
 - Object reorganization is faster than block reorganization
 - It is easier to track the frequency of object use

Implementation (4/6) – Frequency monitoring

- Cache replacement algorithms
 - **Random Replacement (RR)** replaces cache lines by randomly selecting a cache line to evict
 - **Least Frequently Used (LFU)** evicts the cache lines least frequently
 - **Least Recently Used (LRU)** evicts the cache lines used least in the recent past
- Choosing **LRU**
- Using two fixed length LRU lists
 - A hot list
 - A recent list

Implementation (5/6) - Data migration

- Goal
 - Reorganizing data with minimal impact on the foreground workload
- A fixed reorganization interval presents a trade-off
 - If the interval is too short, frequent data reorganization may introduce too much overhead
 - If the interval is too long, performance degradation will be incurred as the data layout becomes less well adapted to the current data access patterns

Implementation (6/6) - Data migration

- For the EED, when the disk is idle, a process running in the background examines the hot list
 - If the objects on the hot list are stored in magnetic disk media, the objects will be moved to the non-volatile memory
 - When the non-volatile memory runs out of its 90% capacity, the objects which are not on the hot list will be migrated to the magnetic disk media

Experimental Evaluation (1/5)


- Three traces
 - **Cello99** trace contains modern workloads which were collected in 1999
 - **Cello96** trace was collected in 1996
 - **TPC-D** is an Oracle trace of decision support processes collected in 1997
- Disk specification
 - Quantum Atlas 10k disk
 - Samsung NAND flash memory (K9F6408U0A)
 - 8M x 8 Bit NAND Flash Memory

Experimental Evaluation (2/5)


- Data access pattern
- The optimal object size
- Evaluating energy saving
- Evaluating performance

Experimental Evaluation (3/5)

- Data access pattern

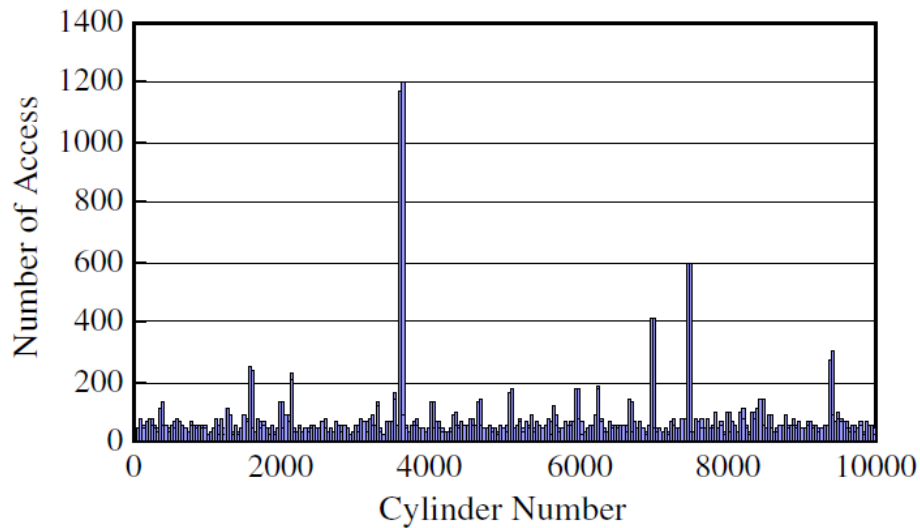


(a) Original data access pattern


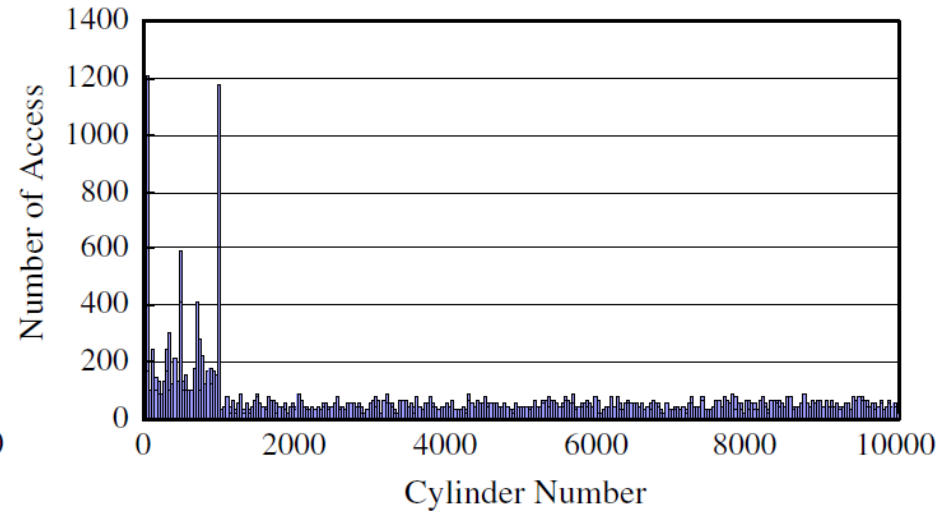


(b) Access pattern after data reorganization

Experimental Evaluation (4/5)

- The optimal object size
 - Performance impact of differing object size

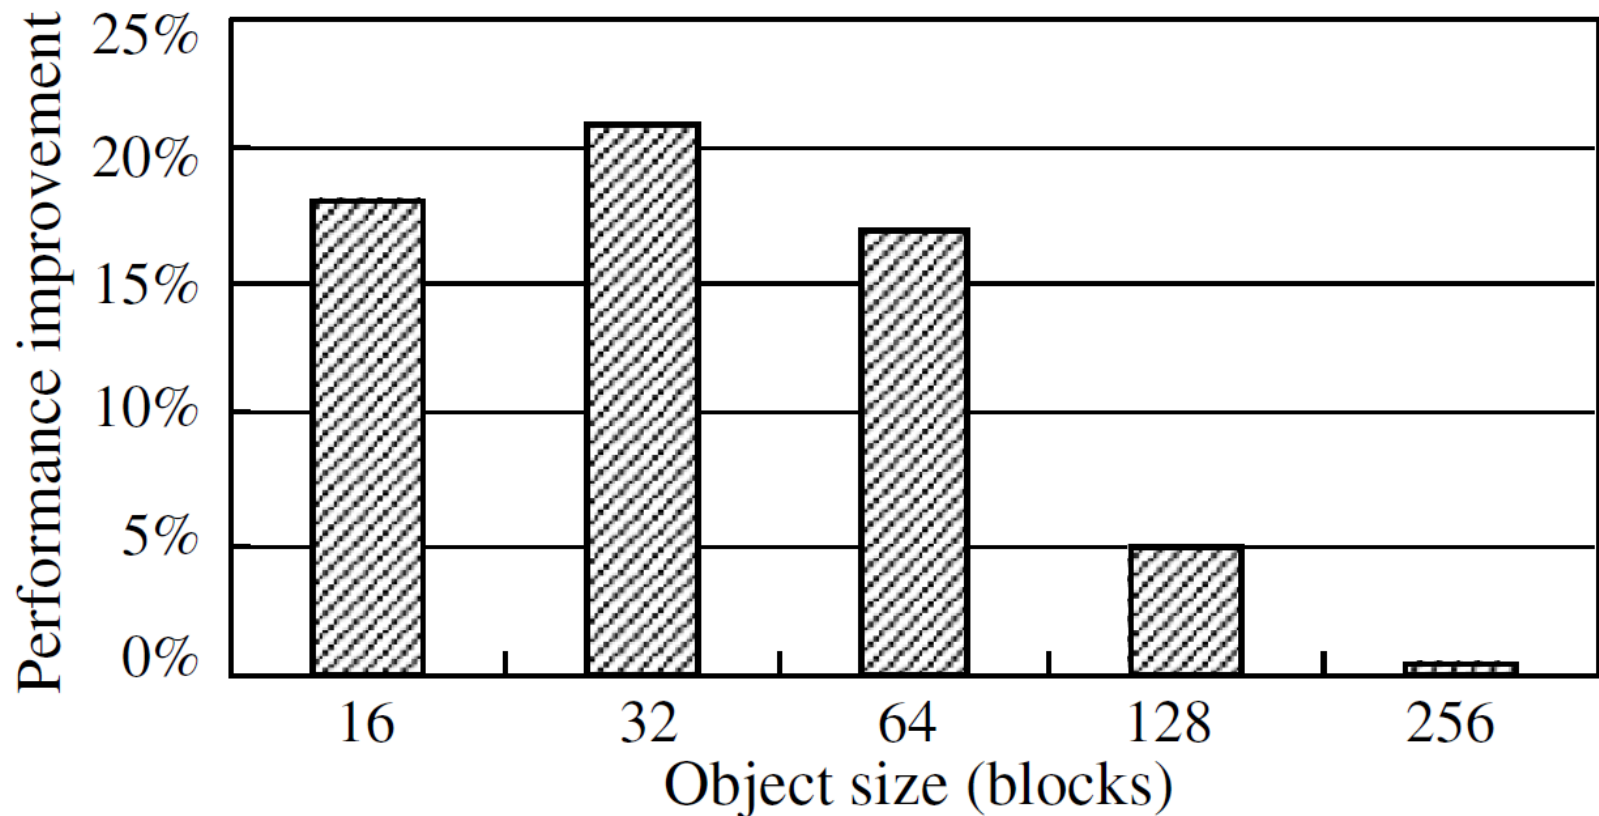

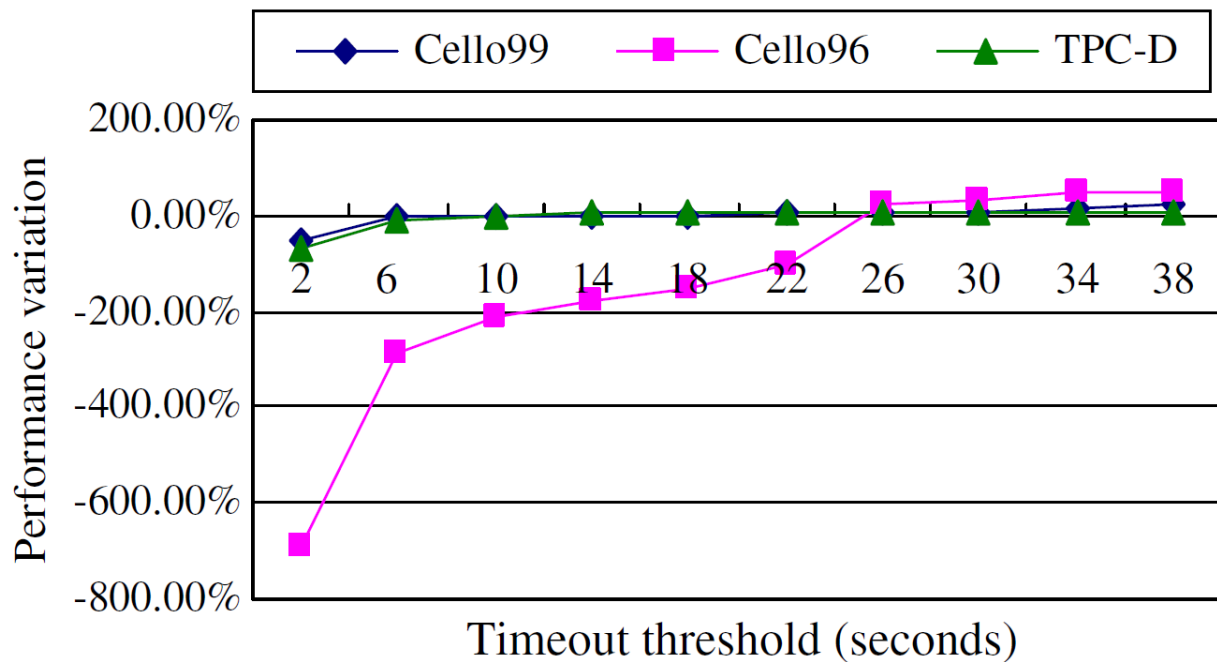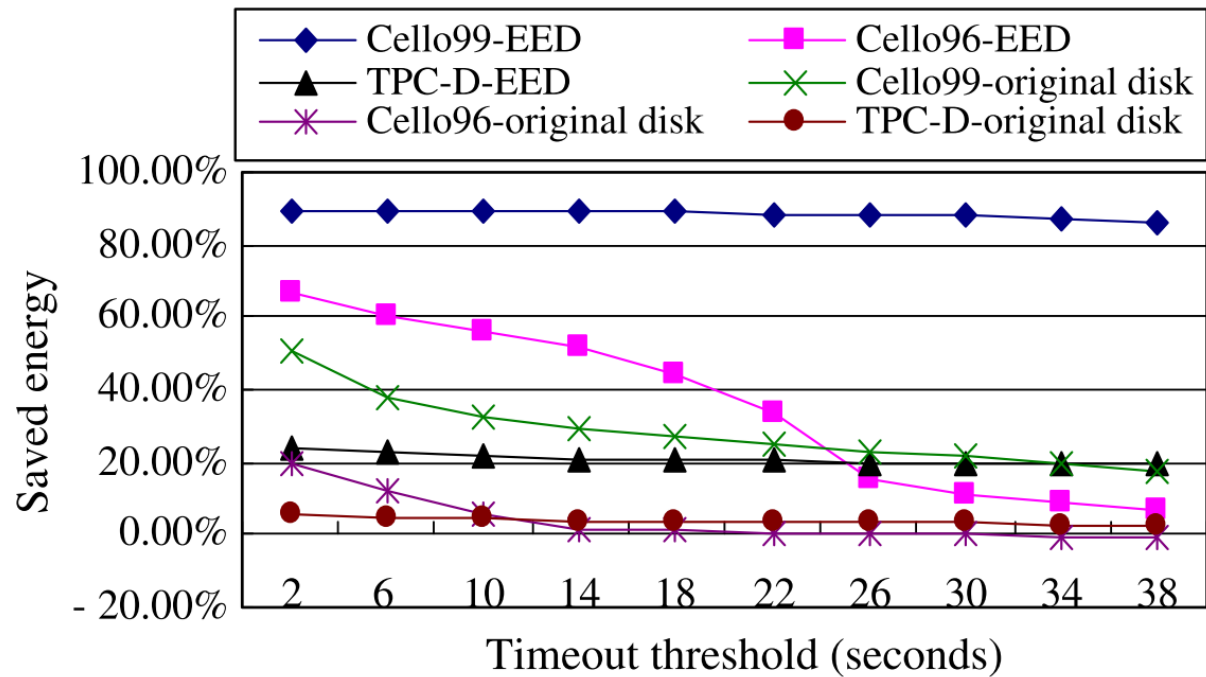

Conclusions

- The EED integrates a relatively small non-volatile flash memory into a traditional disk drive
- The EED reduces the number of program/erase calls and extending the life span of the flash memory